



MOD - 7S6A 1.5"

DC volt meter - 3½ digits

General specifications

DISPLAY: 3½ digit LED (38.10 mm) high brightness.
POWER: wide range power supply options (refer to ordering information)
 Decimal Point selection: from front panel
 Accuracy: ±0.1% of reading ±1 digit at 25°C
 Stability: ±50ppm / °C
 Input voltage protection: 650 VDC
 Conform to standards: IEC 61010-1 Safety requirements
 For measurement, control, and laboratory use, part 1.

CONNECTION:

silver alloy pluggable terminal Shrouded to prevent human contact.
 Terminal: acc IEC 60947-7-1, IEC 60998-1
 Terminal Capacity: 1x4mm without multicore cable end
 1x0.5 to 2.5mm with/without multicore cable end.

MECHANICAL

Self-extinguishing plastic housing, IP40 acc IEC 529
 Mounted: front panel
 IP rating: IP20 acc IEC 529
 Terminal block: 4mm² 12AWG 250VAC
 Box measures: 144x72 mm

AMBIEN CONDITIONS

Operation temperature: -20°C ... +55°C
 Storage temperature: -25°C ... +70°C
 Transport temperature: -25°C ... +70°C
 Relative humidity: 15% ... 85% acc IEC 68-2-6
 Vibration resistance: 10 to 55 Hz (acc to IEC 68-2-6)
 Wight: 348 gr

Technical Data

±1999 (3½) count fowl scale
 Low power requirement
 Wide range power supply potion
 Input voltage protection
 Decimal point selected
 Accuracies are specified at 25°C
 Power consumption: 2.3 VA
 Stability w/Temp ±50ppm/°C
 Span up to 2000 counts
 Measuring Rate: 3 s/min


Ordering information

MOD 7S6A - R - V

R1	60VDC
R2	48VCD
R3	24VDC
R4	12VDC
	230VAC
	110VAC
	24VAC

Power Connection

MOD 7S6A Volt DC

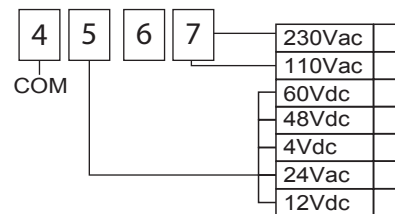

Range




Order	Measuring	Resolution	Input impedance	Basic accuracy
Code	voltage ragne			
MOD-7S6DC-R1	±1.999VDC	1mVDC	100moHM	±0.1% of reading
MOD-7S6DC-R2	±19.999VDC	10mVDC	2moHM	±1 digit
MOD-7S6DC-R3	±199.9VDC	100mVDC	100moHM	at 25°C
MOD-7S6DC-R4	±500VDC	1VDC	2moHM	

Dimensions

BACK

FRONT

PANEL CUTOUT

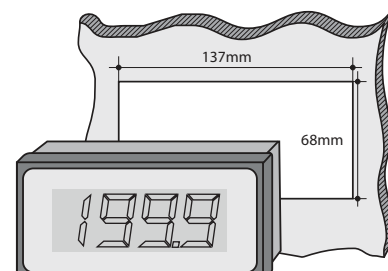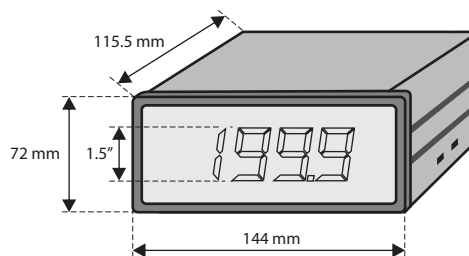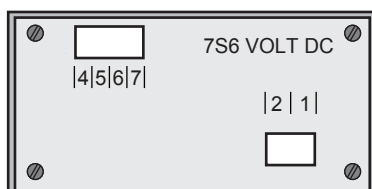

MOD - 7S6A 1.5"

