

L1

1 Phase LED indicator lights.



General specifications

- Operational voltage: 240VAC max / 165VAC min
- Frequency: 50/60Hz
- Indication: LED lamp
- Case material: Self-extinguishing plastic housing UL V0 acc IEC 529
- IP rating: Ip20 acc IEC 529
- IP front panel: IP 30
- Mounting position: vertically
- Mounted: on DIN-rail TS 35 according to EN 50022
- Led consumption: 2mA


Terminals

- Acc to IEC 60947-7-1, IEC 60998-1
- Capacity: 1x4mm² without multicore cable end
1x0.5 to 2.5mm² with/without multicore cable end
- Pitch 5.08 mm
- Rated surge voltage (III/3) 4kV
- Rated voltage (III/3) 250V
- Rated voltage (III/3) 400V
- Tightening torque max 0.25 Nm

Environmental conditions

- Operation temperature: -20°C...+55°C
- Storage temperature: -25°C...+70°C
- Transport temperature: -20°C...+70°C
- Relative humidity acc. IEC 68-2-6: 15% to 85%


Connections



Dimensions & weight

- Width: 18.5 mm
- Height: 89 mm
- Depth (excl. DIN-profile): 45 mm
- Weight: 41.5 gram

Dimensions

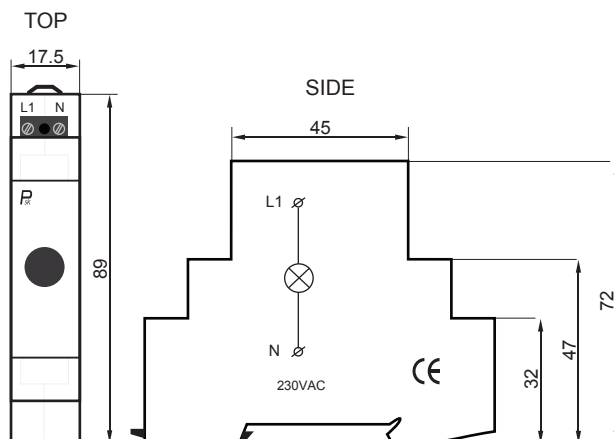

Ordering information

L1 – Color –

red	
green	
orange	
transparent	
blue	